


**3-JAW WEDGE TYPE NON THROUGH-HOLE WATERPROOF POWER CHUCK (WITH ADAPTOR)**

- 防水夾頭適用於立式與臥式CNC車床。
- Waterproof power chuck is suitable for vertical and horizontal CNC lathe.

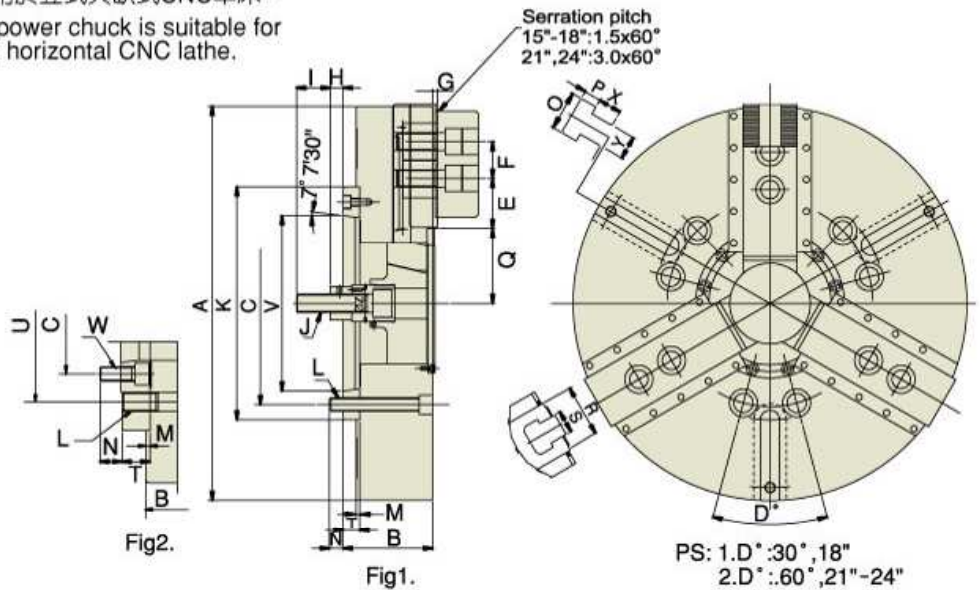

**規格 SPECIFICATIONS**

尺寸 Dim	型式 model	爪行程(直徑) Jaw Stroke (Dia) (mm)	柱塞行程 Plunger Stroke (mm)	最大推力 Max. Pull Force (kgf)	最大夾持力 /油壓壓力 Max. Gripping Force (kgf) / (kgf/cm <sup>2</sup> )	最高轉速 Max. Speed (r.p.m)	重量 Weight (kg)	慣性矩 Moment of Inertia (kgf.m <sup>2</sup> )	適合油壓缸 Matching Cylinder	適合之軟爪 Matching Soft Jaw	適合之硬爪 Matching Hard Jaw
	VW-218A8	16	35	8362	25391/32.6	2700	134	2.41	MS-200	HC-15-1	HJ-15-1
	VW-218A11	16	35	8362	25391/32.6	2700	123	2.11	MS-200	HC-15-1	HJ-15-1
	VW-221A11	16	35	8362	25391/32.6	1900	193	5.1	MS-200	HC-21-1	HJ-21-1
	VW-221A15	16	35	8362	25391/32.6	1900	187	4.9	MS-200	HC-21-1	HJ-21-1
	VW-224A11	16	35	8362	25391/32.6	1750	239	7.5	MS-200	HC-21-1	HJ-21-1
	VW-224A15	16	35	8362	25391/32.6	1750	233	7.1	MS-200	HC-21-1	HJ-21-1

**尺寸表 DIMENSIONS**

尺寸 Dim	型式 model	VW-218A8	VW-218A11	VW-221A11	VW-221A15	VW-224A11	VW-224A15
A		450	450	530	530	610	610
B		141	130	146	146	146	146
C		171.45	235	235	330.2	235	330.2
F		43	43	60	60	60	60
K		300	300	380	380	380	380
L		6-M16	6-M20	6-M20	6-M24	6-M20	6-M24
M		6	6	6	6	6	6
N		24	22	24	34	28	34
T		33	22	27	27	27	27
V		139.719	196.869	196.869	285.75	196.869	285.75
U		171.45	235	235	330.2	235	330.2
E	Max.	50.25	50.25	93.5	93.5	93.5	93.5
	Min.	23.25	23.25	24.5	24.5	24.5	24.5
G		3	3	3	3	3	3
H	Max.	71	78	56	56	56	56
	Min.	36	43	21	21	21	21
I		55	55	55	55	55	55
J		M30X3.5	M30X3.5	M30X3.5	M30X3.5	M30X3.5	M30X3.5
Q	Max.	108	108	86	86	125	125
	Min.	100	100	78	78	117	117
R		62	62	62	62	62	62
S		25.5	25.5	25	25	25	25
W		6-M16	-	6-M20	-	6-M20	-
X		16	16	16	16	16	16
Y		22	22	22	22	22	22
P		22	22	22	22	22	22
O		37	37	37	37	37	37
Z		60	60	60	60	60	60
參考圖 Reference		Fig. 2	Fig. 1	Fig. 2	Fig. 1	Fig. 2	Fig. 1